

Specifications	ZETOR 9741	ZETOR 10741	ZETOR 11741	ZETOR 12741	ZETOR 13241																																																																																																																																																																																																																																																																														
ENGINE	4-cyl. turbocharged diesel, Water cooled, wet sleeves	4-cyl. turbocharged diesel, Water cooled, wet sleeves	4-cyl. turbocharged diesel, Water cooled, wet sleeves	4-cyl. turbocharged diesel, Water cooled, wet sleeves	4-cyl. turbocharged diesel, Water cooled, wet sleeves																																																																																																																																																																																																																																																																														
Engine capacity	254 cu.in	254 cu.in	254 cu.in	254 cu.in	254 cu.in																																																																																																																																																																																																																																																																														
Maximum engine gross horsepower	96	107	117	127	132																																																																																																																																																																																																																																																																														
Maximum engine net horsepower	90	101	111	121	126																																																																																																																																																																																																																																																																														
Rated engine speed	2,200 rpm	2,200 rpm	2,200 rpm	2,200 rpm	2,200 rpm																																																																																																																																																																																																																																																																														
PTO horsepower	81	91	100	108	113																																																																																																																																																																																																																																																																														
Alternator capacity/ Battery capacity	70 Amp/ 950 CCA	70 Amp/ 950 CCA	70 Amp/ 950 CCA	70 Amp/ 950 CCA	70 Amp/ 950 CCA																																																																																																																																																																																																																																																																														
Cold weather starting system	Glow plug in each cylinder	Glow plug in each cylinder	Glow plug in each cylinder	Glow plug in each cylinder	Glow plug in each cylinder																																																																																																																																																																																																																																																																														
Standard fuel tank capacity	48 gal.	48 gal.	48 gal.	48 gal.	48 gal.																																																																																																																																																																																																																																																																														
CLUTCH	Dry, 13" dia., cerametallic	Dry, 13" dia., cerametallic	Dry, 13" dia., cerametallic	Dry, 13" dia., cerametallic	Dry, 13" dia., cerametallic																																																																																																																																																																																																																																																																														
Clutch control	Hydraulic, self-adjusting	Hydraulic, self-adjusting	Hydraulic, self-adjusting	Hydraulic, self-adjusting	Hydraulic, self-adjusting																																																																																																																																																																																																																																																																														
TRANSMISSION	Fully synchronized	Fully synchronized	Fully synchronized	Fully synchronized	Fully synchronized																																																																																																																																																																																																																																																																														
Forward/reverse gears	24/18	24/18	24/18	24/18	24/18																																																																																																																																																																																																																																																																														
Synchronized shuttle	Standard	Standard	Standard	Standard	Standard																																																																																																																																																																																																																																																																														
TRACTOR SPEEDS (mph) (at 2,200 engine rpm)	<table border="1"> <thead> <tr> <th colspan="5">FORWARD:</th> <th colspan="5">REVERSE:</th> </tr> <tr> <th>Speed</th> <th>Range</th> <th>Main</th> <th>Power</th> <th>Speed</th> <th>Speed</th> <th>Range</th> <th>Main</th> <th>Power</th> <th>Speed</th> </tr> <tr> <th>No.</th> <th>Selector</th> <th>Gear Shift</th> <th>Shift</th> <th>(mph)</th> <th>No.</th> <th>Selector</th> <th>Gear Shift</th> <th>Shift</th> <th>(mph)</th> </tr> </thead> <tbody> <tr><td>1</td><td>Low</td><td>1</td><td>1</td><td>1.16</td><td>1R</td><td>Low</td><td>1</td><td>1</td><td>1.35</td></tr> <tr><td>2</td><td>Low</td><td>1</td><td>2</td><td>1.34</td><td>2R</td><td>Low</td><td>1</td><td>2</td><td>1.56</td></tr> <tr><td>3</td><td>Low</td><td>1</td><td>3</td><td>1.55</td><td>3R</td><td>Low</td><td>1</td><td>3</td><td>1.80</td></tr> <tr><td>4</td><td>Low</td><td>2</td><td>1</td><td>1.79</td><td>4R</td><td>Low</td><td>2</td><td>1</td><td>2.08</td></tr> <tr><td>5</td><td>Low</td><td>2</td><td>2</td><td>2.08</td><td>5R</td><td>Low</td><td>2</td><td>2</td><td>2.40</td></tr> <tr><td>6</td><td>Low</td><td>2</td><td>3</td><td>2.40</td><td>6R</td><td>Low</td><td>2</td><td>3</td><td>2.78</td></tr> <tr><td>7</td><td>Low</td><td>3</td><td>1</td><td>2.72</td><td>7R</td><td>Low</td><td>3</td><td>1</td><td>3.15</td></tr> <tr><td>8</td><td>Low</td><td>3</td><td>2</td><td>3.14</td><td>8R</td><td>Low</td><td>3</td><td>2</td><td>3.64</td></tr> <tr><td>9</td><td>Low</td><td>3</td><td>3</td><td>3.64</td><td>9R</td><td>Low</td><td>3</td><td>3</td><td>4.21</td></tr> <tr><td>10</td><td>Low</td><td>4</td><td>1</td><td>3.89</td><td>10R</td><td>High</td><td>1</td><td>1</td><td>5.56</td></tr> <tr><td>11</td><td>Low</td><td>4</td><td>2</td><td>4.50</td><td>11R</td><td>High</td><td>1</td><td>2</td><td>6.42</td></tr> <tr><td>12</td><td>High</td><td>1</td><td>1</td><td>4.80</td><td>12R</td><td>High</td><td>1</td><td>3</td><td>7.44</td></tr> <tr><td>13</td><td>Low</td><td>4</td><td>3</td><td>5.21</td><td>13R</td><td>High</td><td>2</td><td>1</td><td>8.57</td></tr> <tr><td>14</td><td>High</td><td>1</td><td>2</td><td>5.56</td><td>14R</td><td>High</td><td>2</td><td>2</td><td>9.94</td></tr> <tr><td>15</td><td>High</td><td>1</td><td>3</td><td>6.41</td><td>15R</td><td>High</td><td>2</td><td>3</td><td>11.47</td></tr> <tr><td>16</td><td>High</td><td>2</td><td>1</td><td>7.43</td><td>16R</td><td>High</td><td>3</td><td>1</td><td>13.00</td></tr> <tr><td>17</td><td>High</td><td>2</td><td>2</td><td>8.57</td><td>17R</td><td>High</td><td>3</td><td>2</td><td>15.05</td></tr> <tr><td>18</td><td>High</td><td>2</td><td>3</td><td>9.93</td><td>18R</td><td>High</td><td>3</td><td>3</td><td>17.37</td></tr> <tr><td>19</td><td>High</td><td>3</td><td>1</td><td>11.23</td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>20</td><td>High</td><td>3</td><td>2</td><td>12.99</td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>21</td><td>High</td><td>3</td><td>3</td><td>15.03</td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>22</td><td>High</td><td>4</td><td>1</td><td>16.05</td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>23</td><td>High</td><td>4</td><td>2</td><td>18.61</td><td></td><td></td><td></td><td></td><td></td></tr> <tr><td>24</td><td>High</td><td>4</td><td>3</td><td>21.50</td><td></td><td></td><td></td><td></td><td></td></tr> </tbody> </table> <p>Speeds shown are with rear tires 18.4R-38. Add 6% for tires 520/70R-38.</p>					FORWARD:					REVERSE:					Speed	Range	Main	Power	Speed	Speed	Range	Main	Power	Speed	No.	Selector	Gear Shift	Shift	(mph)	No.	Selector	Gear Shift	Shift	(mph)	1	Low	1	1	1.16	1R	Low	1	1	1.35	2	Low	1	2	1.34	2R	Low	1	2	1.56	3	Low	1	3	1.55	3R	Low	1	3	1.80	4	Low	2	1	1.79	4R	Low	2	1	2.08	5	Low	2	2	2.08	5R	Low	2	2	2.40	6	Low	2	3	2.40	6R	Low	2	3	2.78	7	Low	3	1	2.72	7R	Low	3	1	3.15	8	Low	3	2	3.14	8R	Low	3	2	3.64	9	Low	3	3	3.64	9R	Low	3	3	4.21	10	Low	4	1	3.89	10R	High	1	1	5.56	11	Low	4	2	4.50	11R	High	1	2	6.42	12	High	1	1	4.80	12R	High	1	3	7.44	13	Low	4	3	5.21	13R	High	2	1	8.57	14	High	1	2	5.56	14R	High	2	2	9.94	15	High	1	3	6.41	15R	High	2	3	11.47	16	High	2	1	7.43	16R	High	3	1	13.00	17	High	2	2	8.57	17R	High	3	2	15.05	18	High	2	3	9.93	18R	High	3	3	17.37	19	High	3	1	11.23						20	High	3	2	12.99						21	High	3	3	15.03						22	High	4	1	16.05						23	High	4	2	18.61						24	High	4	3	21.50					
FORWARD:					REVERSE:																																																																																																																																																																																																																																																																														
Speed	Range	Main	Power	Speed	Speed	Range	Main	Power	Speed																																																																																																																																																																																																																																																																										
No.	Selector	Gear Shift	Shift	(mph)	No.	Selector	Gear Shift	Shift	(mph)																																																																																																																																																																																																																																																																										
1	Low	1	1	1.16	1R	Low	1	1	1.35																																																																																																																																																																																																																																																																										
2	Low	1	2	1.34	2R	Low	1	2	1.56																																																																																																																																																																																																																																																																										
3	Low	1	3	1.55	3R	Low	1	3	1.80																																																																																																																																																																																																																																																																										
4	Low	2	1	1.79	4R	Low	2	1	2.08																																																																																																																																																																																																																																																																										
5	Low	2	2	2.08	5R	Low	2	2	2.40																																																																																																																																																																																																																																																																										
6	Low	2	3	2.40	6R	Low	2	3	2.78																																																																																																																																																																																																																																																																										
7	Low	3	1	2.72	7R	Low	3	1	3.15																																																																																																																																																																																																																																																																										
8	Low	3	2	3.14	8R	Low	3	2	3.64																																																																																																																																																																																																																																																																										
9	Low	3	3	3.64	9R	Low	3	3	4.21																																																																																																																																																																																																																																																																										
10	Low	4	1	3.89	10R	High	1	1	5.56																																																																																																																																																																																																																																																																										
11	Low	4	2	4.50	11R	High	1	2	6.42																																																																																																																																																																																																																																																																										
12	High	1	1	4.80	12R	High	1	3	7.44																																																																																																																																																																																																																																																																										
13	Low	4	3	5.21	13R	High	2	1	8.57																																																																																																																																																																																																																																																																										
14	High	1	2	5.56	14R	High	2	2	9.94																																																																																																																																																																																																																																																																										
15	High	1	3	6.41	15R	High	2	3	11.47																																																																																																																																																																																																																																																																										
16	High	2	1	7.43	16R	High	3	1	13.00																																																																																																																																																																																																																																																																										
17	High	2	2	8.57	17R	High	3	2	15.05																																																																																																																																																																																																																																																																										
18	High	2	3	9.93	18R	High	3	3	17.37																																																																																																																																																																																																																																																																										
19	High	3	1	11.23																																																																																																																																																																																																																																																																															
20	High	3	2	12.99																																																																																																																																																																																																																																																																															
21	High	3	3	15.03																																																																																																																																																																																																																																																																															
22	High	4	1	16.05																																																																																																																																																																																																																																																																															
23	High	4	2	18.61																																																																																																																																																																																																																																																																															
24	High	4	3	21.50																																																																																																																																																																																																																																																																															
P.T.O. SHAFT Ground Speed P.T.O.	Independent, 540/1000 rpm Standard	Independent, 540/1000 rpm Standard	Independent, 540/1000 rpm Standard	Independent, 540/1000 rpm Standard	Independent, 540/1000 rpm Standard																																																																																																																																																																																																																																																																														


Specifications

	ZETOR 9741	ZETOR 10741	ZETOR 11741	ZETOR 12741	ZETOR 13241
BRAKES					
Service brake control	Wet disc brake	Wet disc brake	Wet disc brake	Wet disc brake	Wet disc brake
Parking brake control	Hydraulic	Hydraulic	Hydraulic	Hydraulic	Hydraulic
	Mechanical	Mechanical	Mechanical	Mechanical	Mechanical
STEERING	Hydrostatic	Hydrostatic	Hydrostatic	Hydrostatic	Hydrostatic
HYDRAULIC SYSTEM					
Flow @ pressure at remotes	Open center; Electronic control	Open center; Electronic control	Open center; Electronic control	Open center; Electronic control	Open center; Electronic control
Total hydraulic flow	19 gpm @ 2,700 psi	19 gpm @ 2,700 psi	19 gpm @ 2,700 psi	19 gpm @ 2,700 psi	19 gpm @ 2,700 psi
Three point hitch	25 gpm	25 gpm	25 gpm	25 gpm	25 gpm
Function	Category I - II	Category I - II	Category I - II	Category I - II	Category I - II
Lifting force @ end of lower links	Position, draft, mixed	Position, draft, mixed	Position, draft, mixed	Position, draft, mixed	Position, draft, mixed
Lifting force @ 24" frame	10,800 lbs.	10,800 lbs.	10,800 lbs.	10,800 lbs.	10,800 lbs.
Standard remote outlets	9,300 lbs.	9,300 lbs.	9,300 lbs.	9,300 lbs.	9,300 lbs.
	3 sets	3 sets	3 sets	3 sets	3 sets
STANDARD TIRES:					
Front	14.9R-24	14.9R-24	14.9R-24	14.9R-24	14.9R-24
Rear	18.4R-38	18.4R-38	18.4R-38	520/70R-38	520/70R-38
MAIN DIMENSIONS					
Length	170 in.	170 in.	170 in.	170 in.	170 in.
Width (cab foot steps)	87 in.	87 in.	87 in.	87 in.	87 in.
Height to top of cab	109 in.	109 in.	109 in.	109 in.	109 in.
Ground clearance without hitch	19 in.	19 in.	19 in.	19 in.	19 in.
WHEEL					
Front	67.5-80 in.	67.5-80 in.	67.5-80 in.	67.5-80 in.	67.5-80 in.
TRACK:					
Rear	62-71 in.	62-71 in.	62-71 in.	62-71 in.	62-71 in.
Turning radius (w/o brakes)	12.3 ft.	12.3 ft.	12.3 ft.	12.3 ft.	12.3 ft.
WEIGHT, w/o weights	9,480 lbs.	9,500 lbs.	9,700 lbs.	9,820 lbs.	9,820 lbs.

STANDARD EQUIPMENT: Power rear differential lock and front wheel drive engagement; Limited slip front differential; Ground speed PTO; Telescopic sway bars with fine adjustment; Telescopic lower links; Deluxe seat with multiple adjustment, swivel motion and arm rests; Tilt and telescoping steering wheel; Tinted windows; Front and rear wipers; Windshield washer; Heated rear window; Heated rear view mirrors; Roller sun blind; Digital display dashboard; Front fenders; Three sets of remote outlets (one set with detented pressure positions, built-in check valve and automatic pressure release); Air conditioning; Six front and three rear halogen lights; Speakers and antenna for radio installation (radio not included)

OPTIONS: Block heater; Front and rear weights; Three-point hitch with hooks instead of telescopic lower links; Front PTO and front 3point hitch with quick-detach lower links, compatible with Zetor 202SLX front loader; Air-ride seat; Instructional seat

ZETOR system 202 SLX Front End Loader

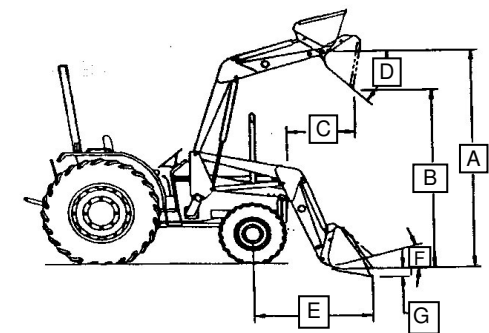

A	Maximum Lift Height (in.)	155
B	Clearance with Bucket Dumped (in.)	120 *
	Reach at Maximum Height (in.)	26 *
	Maximum Dump Angle (deg)	70
E	Reach on Ground (in.)	101
F	Bucket Rollback Angle (deg)	42
G	Digging Depth (in.)	3

Standard Bucket Size: 83 in.

*)Bucket at 45 deg. angle

Optional Bucket Size: 73 in.

Standard features: Quick-attach loader boom; Quick-attach buckets; Mechanical self-leveling; Power-beyond hydraulic valve, cable-controlled by heavy duty joystick; Full length mounting frames, welded in one piece on each side; Replaceable bushings at all pivot points

Options: Shock absorber with shutoff valve; Third hydraulic function

Note: The loader hydraulic system is connected directly to tractor pump and does not require remote hydraulic outlets.

Lift Capacity to Full Height (lb.):	
- at pivot points	3,800
- 31.5" ahead of pivot	2,750
Breakout Force (lb.):	
- at pivot points	5,100
- 31.5" ahead of pivot	3,800
Raising Time w/19 gpm Pump	4.3
Weight with 83" Bucket (lb.)	3,045

Specifications measured on model 10741 with tires 14.9-24 and 18.4R-38.